

FIG. 1 is a perspective view of a container assembly in an open position. The container assembly includes a container body 20 and a lid 62. The lid 62 is hinged to the container body 20 at a hinge 46. The lid 62 is shown in an open position, revealing the interior of the container body 20. The container body 20 includes a base 22 and a side wall 24. The lid 62 includes a top wall 64 and a bottom wall 66. The hinge 46 is located at the junction of the base 22 and the side wall 24. The lid 62 is shown in an open position, revealing the interior of the container body 20. The container body 20 includes a base 22 and a side wall 24. The lid 62 includes a top wall 64 and a bottom wall 66. The hinge 46 is located at the junction of the base 22 and the side wall 24. The lid 62 is shown in an open position, revealing the interior of the container body 20.

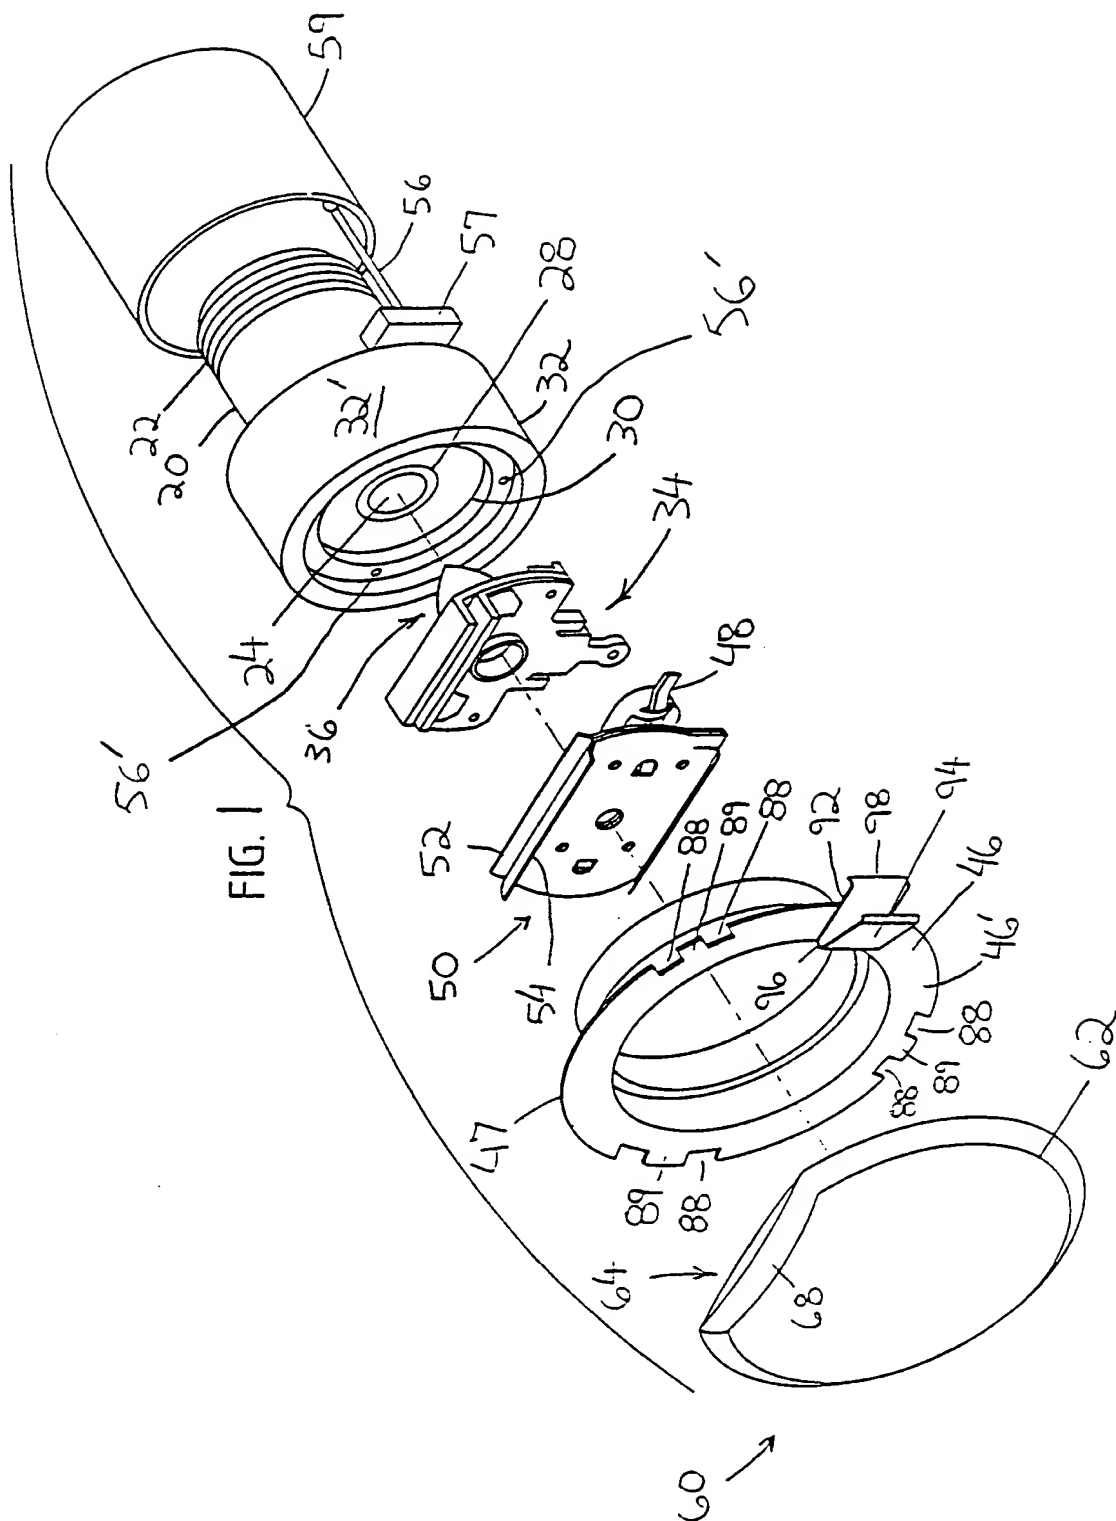




Fig. 4

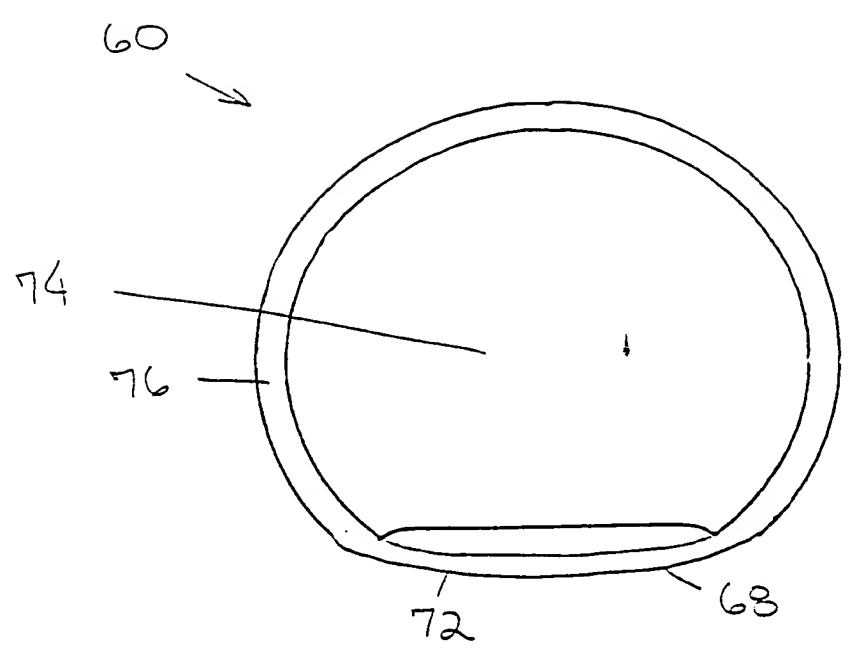
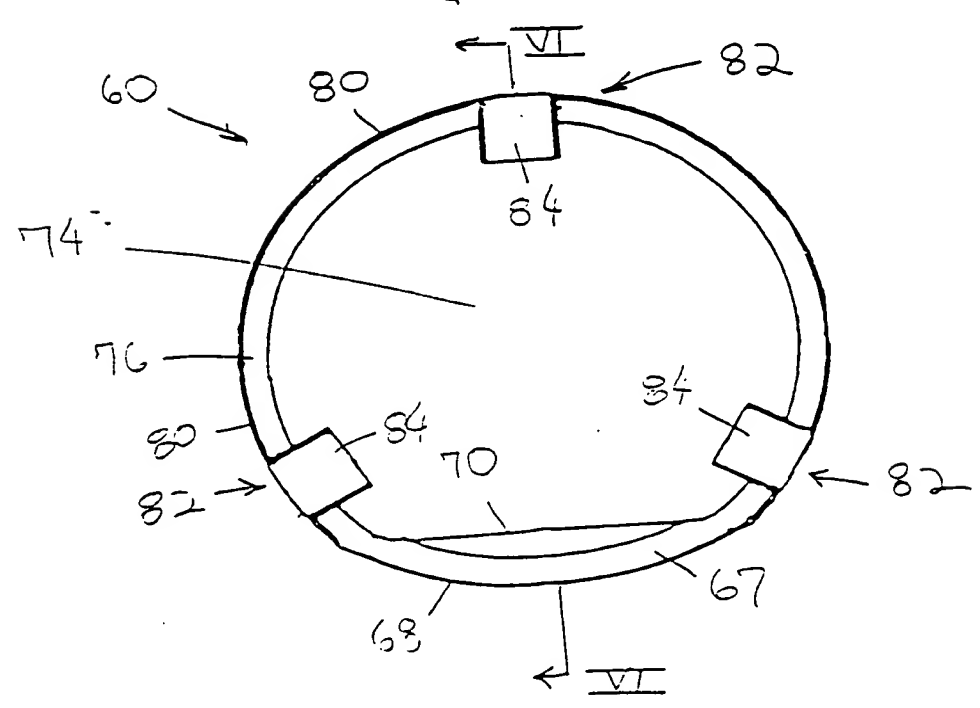


Fig. 5



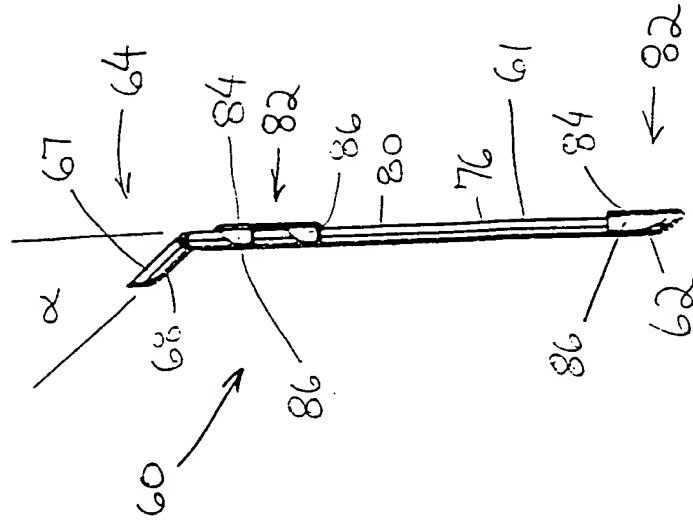


Fig. 6

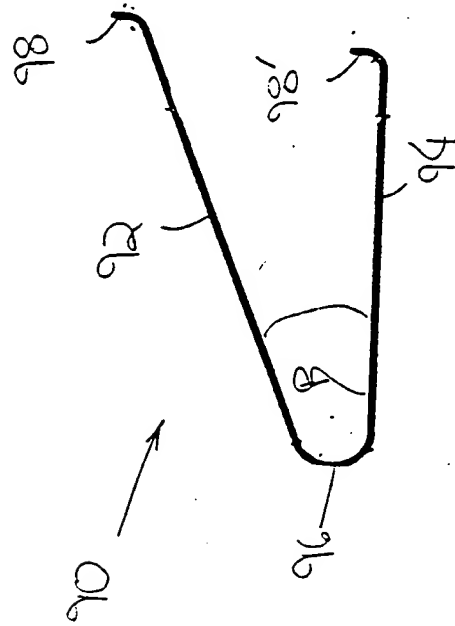


Fig. 7

FIG. 8 is a perspective view of the device of FIG. 7, showing the device in a closed position. The device is shown in a perspective view, and the components are labeled with reference numerals. The device is shown in a perspective view, and the components are labeled with reference numerals. The device is shown in a perspective view, and the components are labeled with reference numerals.

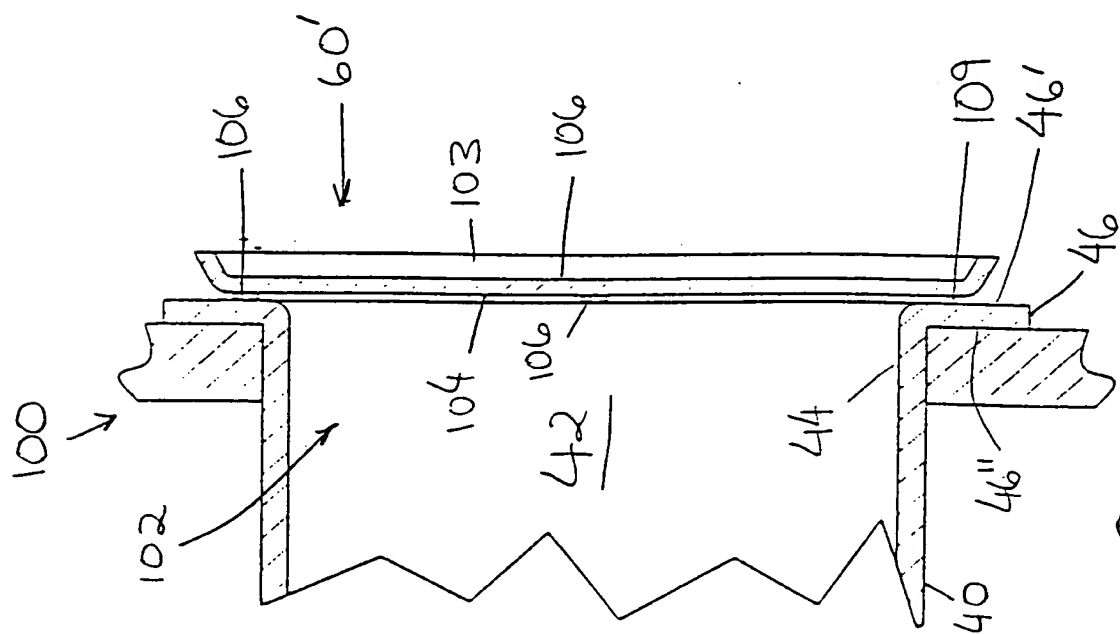


FIG. 8

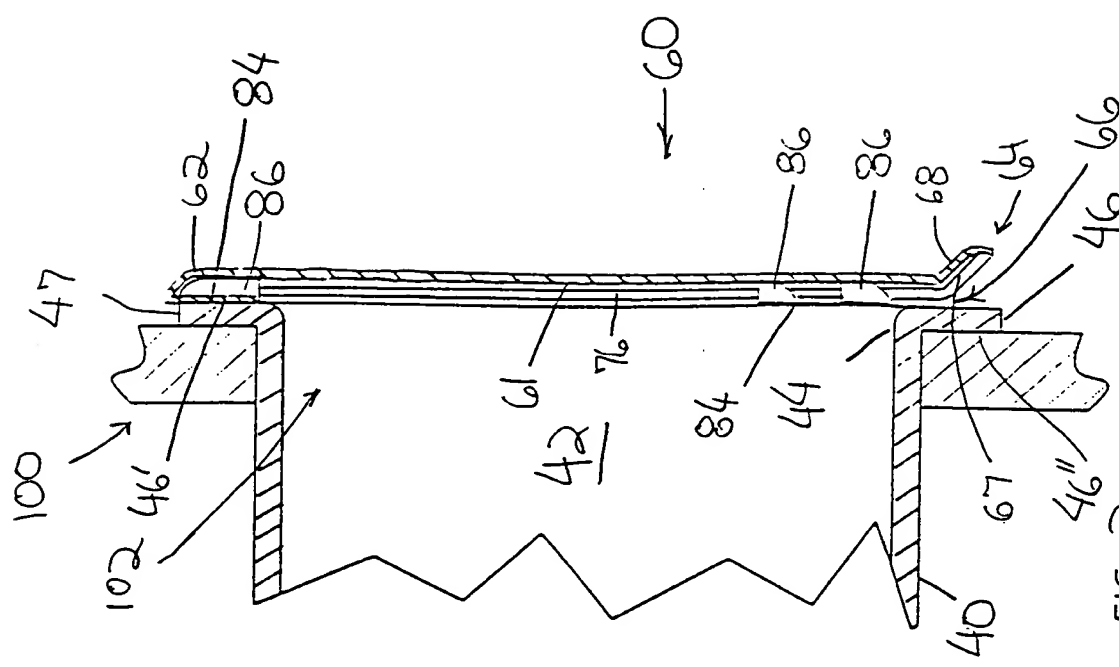
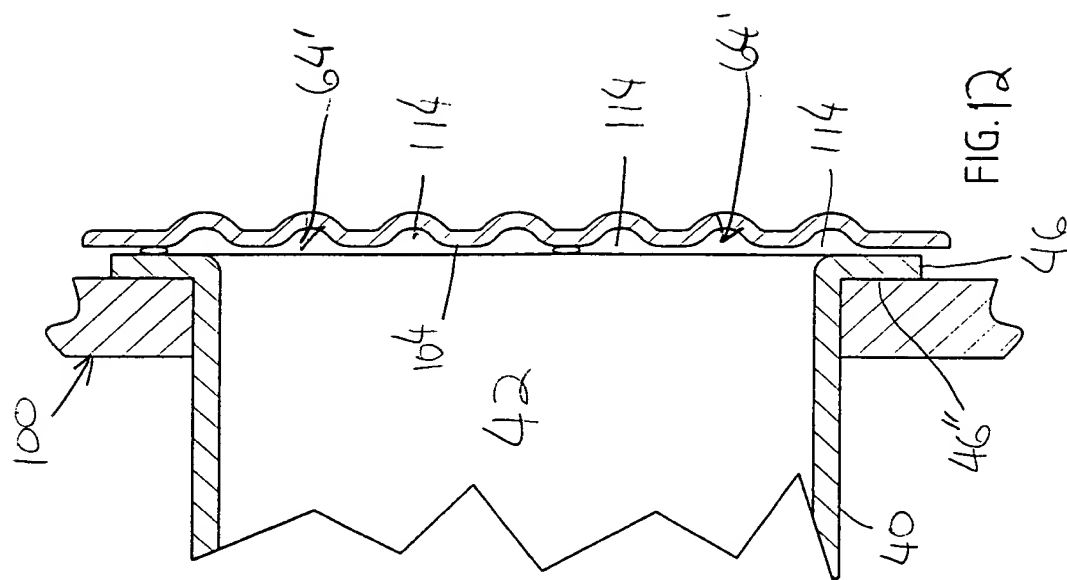
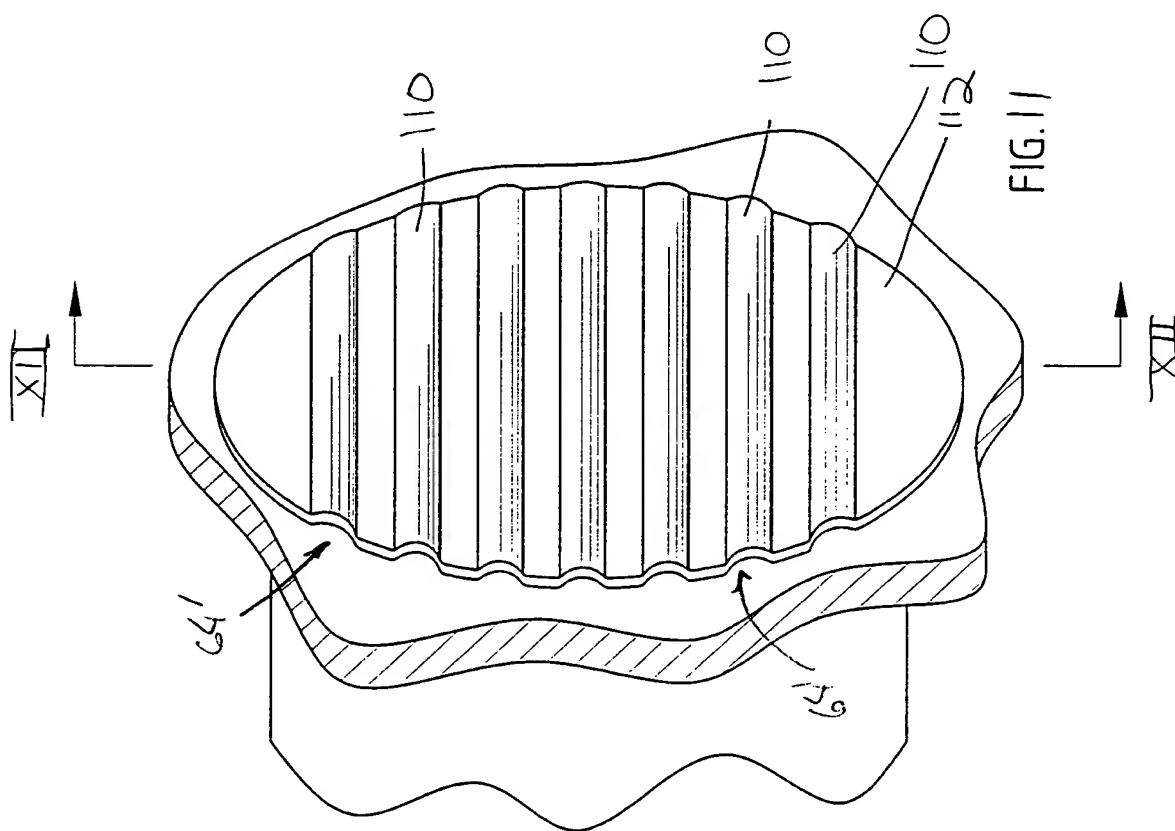


FIG. 3

809454



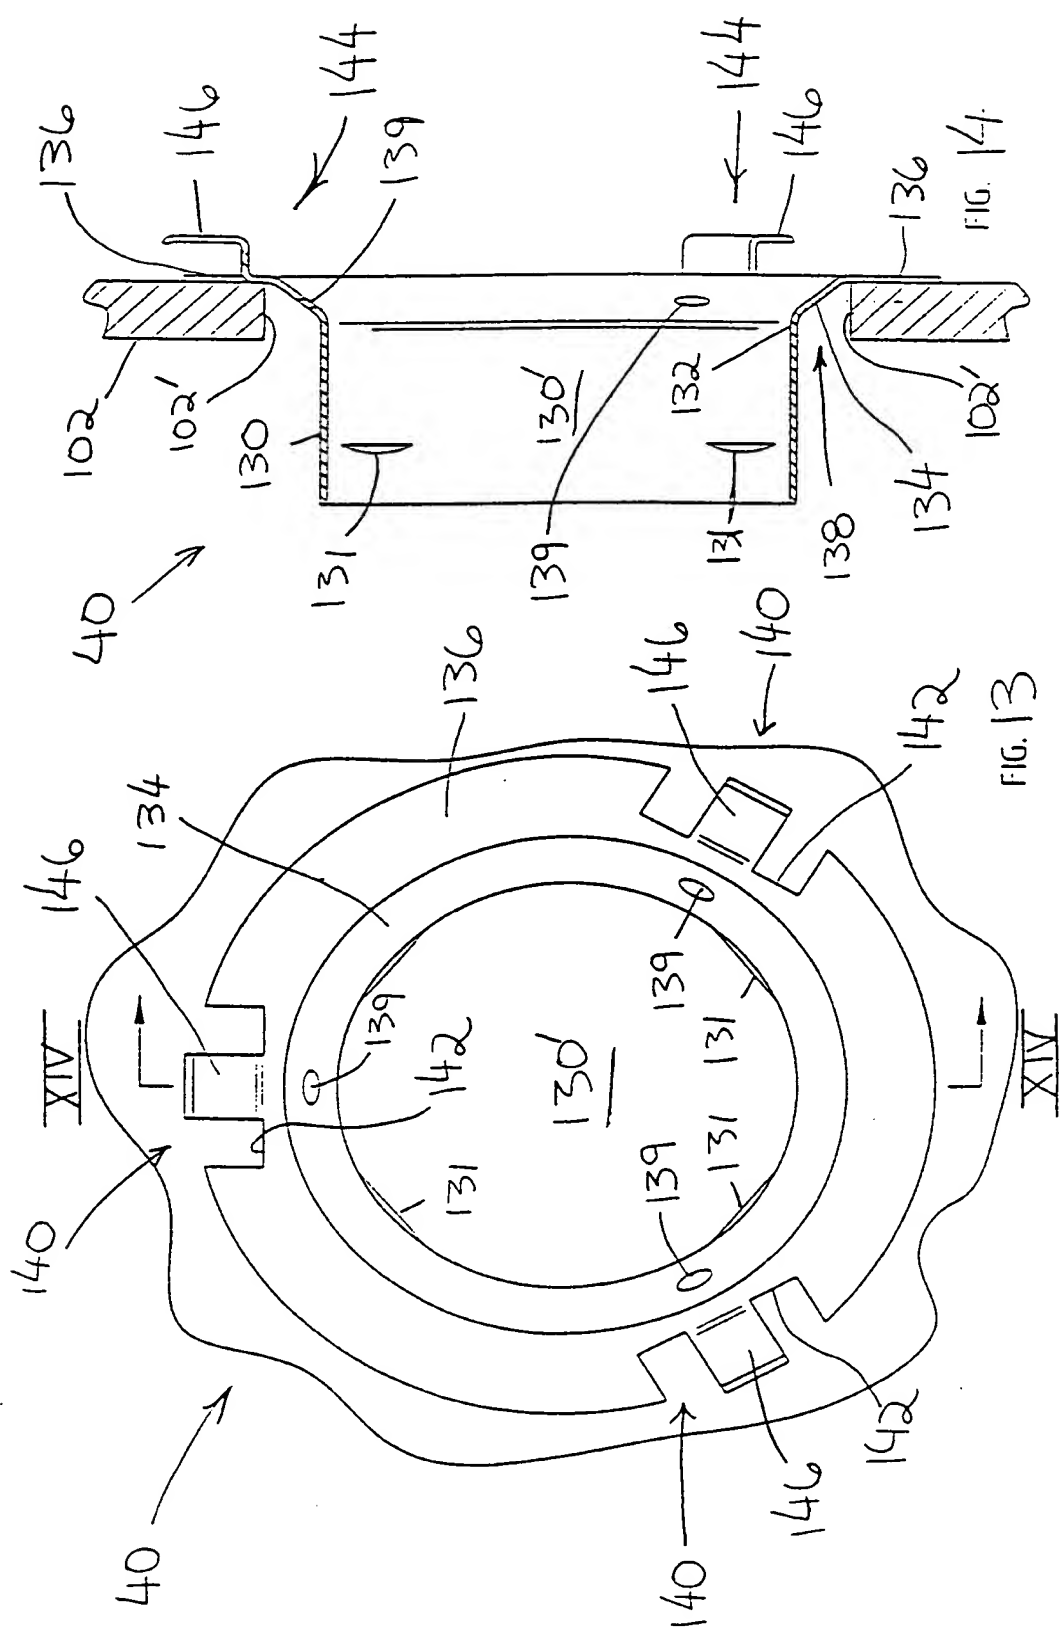


FIG. 15 is a perspective view of the device 120 in a closed position. The device 120 includes a main body 122 and a clasp 124. The clasp 124 is shown in a closed position, securing the device 120. The device 120 is shown in a perspective view, highlighting its three-dimensional structure.

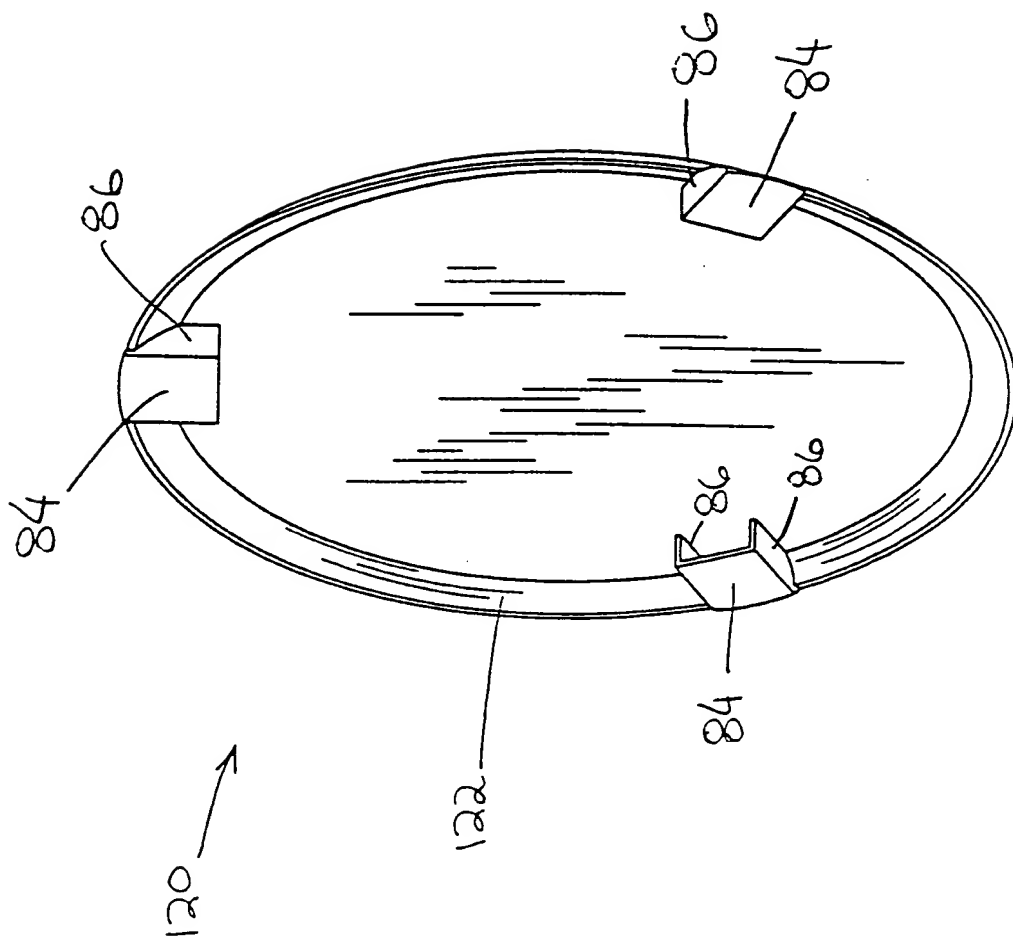


FIG. 15



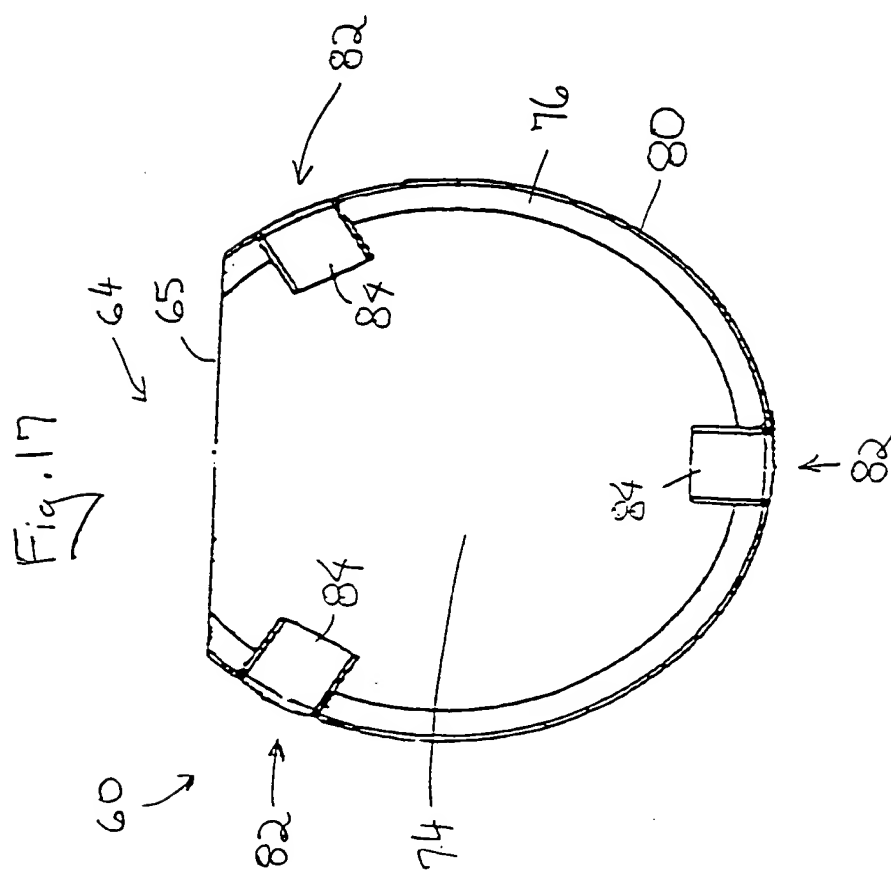
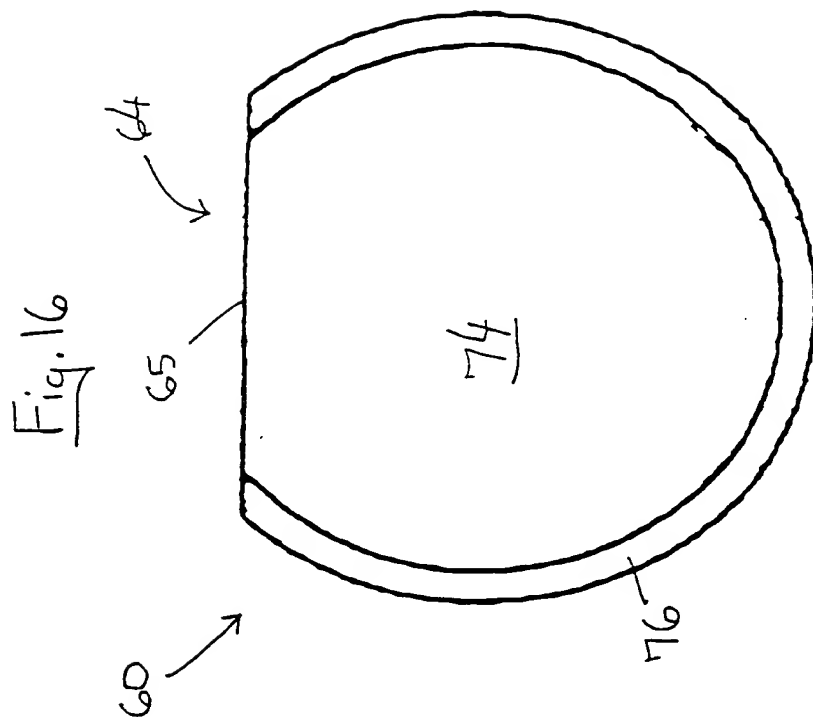


Fig. 18

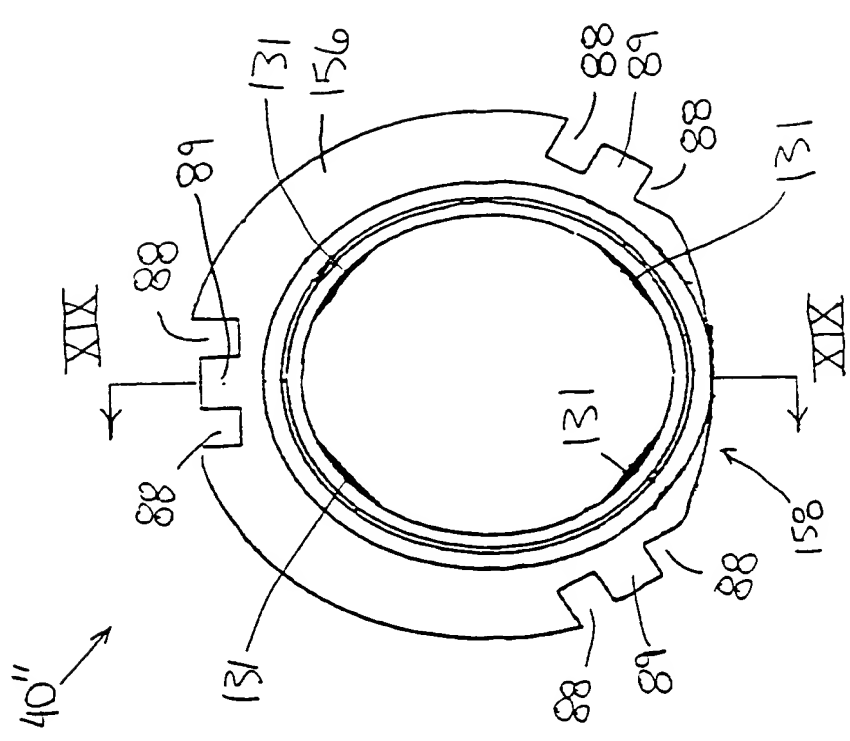


Fig. 19

